



# APAR INDUSTRIES LTD.

(UNIT : UNIFLEX CABLES)



Innovative Cable Solutions

## ELECTRON BEAM IRRADIATED SOLAR CABLES



100% Renewable Energy



CLEAN ENERGY  
GREEN ENVIRONMENT

**GO GREEN**

[WWW.APAR.COM](http://WWW.APAR.COM)



E-BEAM

ELECTRICAL

ELASTOMER

TELECOM



# COMPANY PROFILE



**APAR INDUSTRIES LTD** founded by Late. Mr. Dharmsinh D. Desai, in the year 1958 is one among the best establishment company in India operating in the diverse field of Electrical, Metallurgical and Chemical engineering. Over the year it has evolved to be a Rs 5000 Cr diversified company, offering value added products and services in Power Transmission Conductors, Transformer Oils & Specialty Oil Products and Power distribution & Telecommunication Cables after merger of Uniflex Cables Ltd. with Apar Industries Ltd. Apar Industries is the 5th largest manufacturer of Transformer Oils in the world. Apar is also amongst the largest producer and exporter of Conductors having export to over 65 countries in the world having full range of ACSR and AAAC upto 1200 kv and recently introduced state of the art High Temperature Conductors.

Apar Industries Ltd. (Unit: UNIFLEX CABLES) has its plants at Umbergaon and at Khatalwad in south Gujarat (150 Km from Mumbai) for manufacture of Energy & Telecommunication Cables. Apar has also set up a state of the art 1.5 MeV and 3.0 MeV Electron Beam Accelerators along with suitable handling systems.

## POWER CABLES

This includes XLPE Cables upto to 33 KV besides LV PVC and specialty Cables. The company has a state of the art manufacturing facility to manufacture Medium Voltage XLPE cables on a high precision CCV line from Royale Systems, USA. The company manufactures cables as per Indian as well as International standards. The facility is also equipped to manufacture LT and MV Aerial Bunched Cables upto and including 33 kv, Instrumentation pairs and Triad Cables, Control Cables, PVC Flexible cables for Building and Panel wiring. The company has also introduced Medium Voltage Covered Conductors and Anti Irradiated Power Theft Cables.

## ELASTOMER CABLES

The company enjoys a pioneer status in manufacture of Elastomer Cables in India and has been supplying these types of cables since 1981 to various clients like Railways, Ship-Wiring, Steel and Cement Plants, Nuclear Plants, Windmills, Solar and Mining Sectors. The plant facility is capable to process various types of compounds like EPR, EPDM, PCP, CSP, CPE, Silicon, EVA Halogen free and Fire Resistant non Toxic Compounds. We offer cables with ATC, GI wire braid, Synthetics or Textile Yarn and Glass Fibre. Our range includes Trailing Cables, Locomotive Cables, Ship Wiring Cables, Wind Mills Cables, Solar Cables, Welding Cables, Mining Cables, LFH Cables & Wires, Fire Survival and Composite Cables having integrated Fibre Optic core.

## OPTIC FIBRE CABLES

The company manufactures High Performance Data and Video Transmission cables which includes 2F to 24F Unitube and 2 F to 432 F Loose tube. Also manufactures Ribbon Cables of Unitube 144F and Multitube 588F.

The cables are manufactured in various configurations like Unarmoured, Armoured, ADSS, Fig.8, FTTH etc with Single mode or multimode fibers. These cables are extensively deployed with Telecom Operators like BSNL/BBNL, Reliance Infocom, Reliance Jio, and several multi service operators. Cables can be offered to any National or International Specifications.

## ELECTRON BEAM IRRADIATION FACILITY

State of the Art Electron Beam Accelerators (1.5 MeV and 3 MeV) in Western India at Khatalwad located about 20 kms away from Vapi, Gujarat. We have complete handling system for irradiation of various types of Electrical and Automotive Cables & Wires, PE sheets, Polymeric Tubes and Pipes, Heat Shrink Products, Gems and Diamonds, Medical product Sterilisation, reprocessing of PTFE scrap etc. The Electron Beam Cross Linked wires and cables offer superior performance in demanding application and in extreme environments. Our high performance EBXL cables have been Type approved by renowned organizations like TUV, DQAN, DRDO, RDSO, Railways, ABS, NPCIL etc.

## SPECIALITY CABLES:

The company offers various types of Hybrid / Speciality Cables. We have a diverse experience to design and offer specialized cables like Trailing Cables with Power/Control/Shielded cores, CRD cables with integrated Multimode Optical Fibre Cables, Underwater subsea cables, Festoon Cables, 11 KV landline Mining cables for Stacker/Reclaimer etc. We have to our credit for development of cables like Heavy TOW Cables and Light TOW cables for subsea applications, Torpedo cables (Fibre Optic Cables for Naval applications), Festoon Fibre Optic Cables for Large cranes, Elastomeric Cables upto 33 KV for Mining and Windmill applications, Aluminium Conductor Elastomer Cables, Electron Beam Irradiated Cables for Railway Locomotive and Ship Wiring, CRD cables with integrated Fibre Optic for ladel cranes for steel industry, Solar PV Cables for DC applications and Solar Cables with Rodent Resistance, Underwater Sub-sea Power Cables and Sub-Sea Fibre optic cables.

## APAR ANUSHAKTI WIRES

Developed in House, APAR ANUSHAKTI Wires with Speciality developed PVC Compounds of 105°C rating enabling Protection against Electric Shock/Short Circuit, High Oxygen & Temperature Index for Fire Retardancy, Wires can easily take long term overload of over 40%, Insulation does not melt in contact with hot object, non softening, infusible and non dripping, High Insulation Resistance, Self Extinguishing and do not catch fire, better ageing properties and longer cable life.

# CERTIFICATES



## ELECTRON BEAM IRRADIATION FACILITY:

Apar Industries has diversified into technological advanced state of the art green field project at Khatalwad, Dist. Vapi, Gujrat with 1.5 MeV and 3.0 MeV Electron Beam Accelerators alongwith handling systems suitable for irradiation of various types of Electrical Cables and Wires, PE Sheets, Polymeric Rubes/Pipes, Heat Shrink Products, Gems & Diamonds, Medical product sterilisation, reprocessing of PTFE scrap which is being imported into India for Industrial Lubricants, Greases, Waxes, Paints, Mouldings, PTFE Linking etc.

Electron Beam Irradiated Cables and Wires offer superior performance in extreme environments. Some of the improved properties are like Superior performance of cables and wires, Improved Mechanical properties, Improvement in Tensile Strength, Abrasion Resistance, Thermal Resistance, Stress Cracking Resistance, Flame Propagation Resistance, Deformation Resistance and cut through Resistance.

Due to high performance Railways for their Locos Electric/Diesel switched over to Electron Beam Cables & Wires. Similarly for Ship Wiring Cables, Automotive Cables, Solar PV Cables and Nuclear Radiation Resistant most of the users have switched over to E Beam Irradiated Cables. Since life of cables is much higher than chemically cross linked cables; many users have adopted Electron Beam Irradiated Cables. Even in Solar and Wind Energy cables developers have found that Electron Beam cables can withstand the harsh environmental conditions hence preferred to use Electron Beam Irradiated Cables over the conventional cables with Chemically Cross-linked cables.

## APPLICATIONS OF ELECTRON BEAM (EB) TECHNOLOGY:

There are several applications where the Electron Beam Technology can be deployed. At Apar, the suitable handling systems have been installed to use the facility for following products. Further identification of applications are being explored.

EB cross-linking of wire & cables are well established and it is the most important commercial application of radiation technology. Polymeric based formulations that can be cross-linked using EB accelerator have been developed to meet the customer specifications particularly for railways, Ship wiring Wind Mill cables, Solar PV cables & Building wires.

### TYPICAL WORKING OF E BEAM


An electron Gun is housed in a thick vessel.

Number of Electrons are accelerated in an acceleration tube. Their power can be regulated and controlled.

The electrons are directed to a scanning device magnetically

The material which is required to be Irradiated are passed under the beam through set of under – beam equipments and given exposure to predetermined doses.

Highly accelerated electrons penetrate the insulation or sheath of cables. This results in the generation of carbon radicals which links or cross links the polymer chains of the plastic tdthree dimensionally with each other.

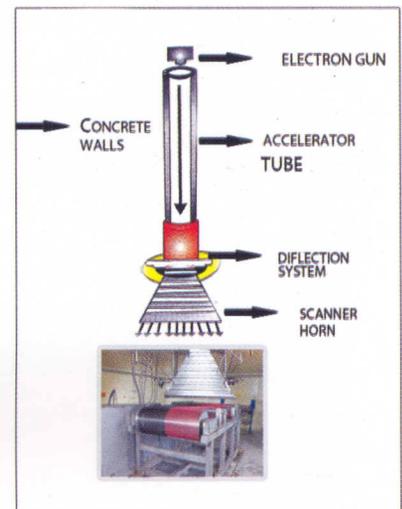

### DIFFERENT TYPES OF UNDER BEAM HANDLING SYSTEMS



## E-BEAM IRRADIATED, SOLAR PV CABLES

Apar has in-house developed suitable XLPO compound for Electron Beam irradiation for a range of solar Photo-Voltaic Cables for emerging PV based renewable energy installations. Globally almost 90% of Solar PV cables are manufactured with this Electron Beam Irradiation technology only.

**Application:** ATC flexible conductor, Dual wall Electron Beam irradiation insulated for Photovoltaic Power applications for connection from PV Cell to Junction Box/Inverter in dry, damp or wet Conditions.

It can be installed in open trays or in ducts/conduits. Rodent resistant Design of Solar PV Cable also available as given below.

**Construction:** Annealed Electro-Tinned fine copper strands(bunched to meet class 5 flexibility as per IEC 60228/VDE 0295), Insulated and sheathed with Polyolefin Co-Polymer(XLPO), Electron Beam cross-linked.

Sheath colour: RED or Black, Black with Red stripe also available (Black recommended)

### ADVANTAGES OF ELECTRON BEAM CROSS LINKED XLPO:

- Continuous operating Temperature 120° C, hence higher current carrying capacity.
- Better UV & Ozone resistance and improved weather resistance in adverse conditions.
- Improved oil & Chemical resistance, improved crack resistance.
- Improved Mechanical Properties of the cables in elevated temperature conditions.
- Improved Flammability properties, Halogen Free.



### TECHNICAL SPECIFICATION:

Voltage Rating: U/U = 600/1000 V AC, 1000/1800 V DC  
 Test Voltage: 6.5 KV 50 Hz Or 15 KV DC for 5 min  
 Temperature Rating: -40° C up to +120° C  
 Ambient Temperature: -40° C up to +90° C  
 Max.Short circuit Temp: 250° C (for 5 Sec)  
 Oil & Chemical resistance: IEC 60811-1  
 Bending Radius: > 4xØ(cable OD)

### STANDARD/MATERIAL PROPERTIES

Fire Performance: IEC 60332-1-2  
 Smoke Emission: IEC 61034-2/EN 50268-2  
 (light Transmission > 60%)  
 Halogen Free: IEC 60754-1  
 (HCL content < 0.5%)  
 Expected life of cable: > 25 Years at 90°C  
 Conforming to TUV 2Pfg - 1169/08.2007 PV1 F

Solar DC Cables as per standard EN 50618 are also available.

### "APAR ANUSHAKTI" E-BEAM IRRADIATED ATC FLEXIBLE CONDUCTOR, XLPO INSULATED, XLPO SHEATHED SOLAR CABLE

Size sq.mm	Conductor No./Dia of strand (mm) (nom.)	Insulation Thickness mm (Minimum)	Sheath Thickness mm (Minimum)	Cable OD mm (Nominal)	Weight of Cable Kg/Km (Approx.)	Current Rating (A)			Max. DC resistance of conductor at 20°C (Ohm/Km)
						At 60°C In Air	Single Cable on Surface	2 Cables Adjacent on Surfaces	
2.5	50/0.25	0.5	0.5	4.2	35	41	39	33	8.21
4	56/0.3	0.5	0.5	4.7	50	55	52	44	5.09
6	84/0.3	0.5	0.5	5.5	70	70	67	57	3.39
10	80/0.4	0.5	0.5	6.5	110	98	93	79	1.95
16	126/0.4	0.5	0.5	8.3	170	132	125	107	1.24
25	196/0.4	0.5	0.5	11.0	285	176	167	142	0.795
35	276/0.4	0.5	0.5	12.0	385	218	207	176	0.565
50	396/0.4	0.8	1.0	14.0	535	276	262	221	0.393
70	360/0.5	0.9	1.0	16.0	735	347	330	278	0.277
95	475/0.5	0.9	1.1	18.0	945	416	395	333	0.21
120	608/0.5	1.0	1.1	20.0	1190	488	464	390	0.164
150	756/0.5	1.2	1.2	22.5	1485	566	538	453	0.132
185	925/0.5	1.4	1.3	25.0	1830	644	612	515	0.108
240	1221/0.5	1.5	1.4	28.0	2375	775	736	620	0.0817
300	1525/0.5	1.6	1.5	31.0	2975	895	850	716	0.0654


Rating Factor:							
Ambient Temp °C	< 60	70	80	90	100	110	
Rating factor	1	0.91	0.82	0.71	0.58	0.41	

## "APAR ANUSHAKTI" LT XLPE (120° C) INSULATED POWER CABLE

The XLPE cables are conventionally manufactured by Chemical Cross Linking Process and are suitable for max operating temperature of 90° C. Apar has successfully developed Electron Beam Cross Linked XLPE (120° C) Insulated Power & Control Cables Suitable for Insulation rating 120° C (max continuous operating temperature). These cables are provided with 105° C rated inner & outer PVC Sheath to support cable usage at higher operating temperature.

It can be installed in open trays or in ducts/conduits. Rodent resistant Design of Solar PV Cable also available as given below. The following factors are generally considered for selecting a suitable cable size LT cables for connection from inverter output (AC) to LT Panels, LT Panels/Switchgear to Transformer Primary, Protection equipments and other auxiliary equipments.

- Maximum Load Current.
- Magnitude and duration of possible overload and of Short circuit current.
- Voltage Drop and line Length.
- **Type of Installation:**
  - Underground (Direct or in Ducts), in Air, Combination of Underground and in Air.
  - Cables in the vicinity especially in Ducts/Cable trays.
  - Fire Safety requirements.
- Max & Min ambient temperature.
- Chemical and physical properties of soil for UG Installations
- Technical Specifications and any Special requirements

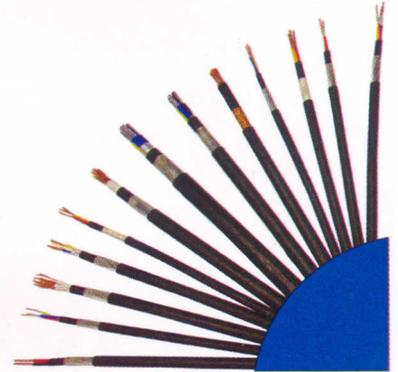

The cable system designer selects the cable size taking into account all the de-ratings of installation conditions such that there is sufficient cushion available for any unforeseen situations and possibility of any future overloading. Therefore, for normal (90° C) LT XLPE cables, the Cable System designer tends to load the cable maximum up to 75° C to Perhaps 80° C Max operating temperature, keeping the balance as cushion. The Solar Installations are generally taking Place in high ambient Zones, like Rajasthan, AP, TN and Gujarat etc where the ambient temperature in summer reaches as high as 50° C to 55° C. Since the cable cannot be loaded beyond 80° C, occasionally the cable designer opts for over sized cable, leading to higher capital costs.

Apar Anushakti LT XLPE cables suitable for max 105° C (though its XLPE Insulation is rated 120° C) can be considered for full loading of cable up to 90° C Keeping balance 15° C as available cushion for any future overloading. It offers 2 options:

- a) Keep the conductor size same, it allows cable system designer to consider cable loading up to 90° C (Keeping Balance as cushion) and it will ensure a much longer life of cable.
- b) There exists an opportunity for cable system designer to consider one size lower thus offering unprecedented cost reduction benefits technical advantage.

### Cable construction:

0.65/1.1KV Grade Stranded Aluminium or copper conductor, EB-XLPE Insulated, PVC Inner/Outer Sheathed, Armoured/Un-Armoured Cables Conforming to IS:7098 or IEC:60502-1 or other International Standards.



APAR ANUSHAKTI ALUMINIUM CONDUCTOR ARMoured EB-XLPE INSULATED ARMoured POWER CABLE 650/1100 VOLTS AS PER IS 7098 PART 1

SIZE	EB-XLPE (120°C) INSULATION THICKNESS	INNER SHEATH - EXTRUDED	ARMOUR	OUTER SHEATH	OVERALL DIA. OF CABLE	NET WEIGHT OF CABLE	MAX. D.C RESISTANCE OF CONDUCTOR AT 20°C	MAX. A.C RESISTANCE AT 105°C	REACTANCE AT 50 Hz	CAPACITANCE	IMPEDANCE	VOLTAGE DROP	CONTINUOUS CURRENT CARRYING CAPACITY		SHORT CIRCUIT RATING (DURATION 1 SEC.)	PACKING	
													at conductor temp. 105°C	at conductor temp. 90°C			
CORES X CROSS SECTIONAL AREA	NOM. THICKNESS	MIN. THICKNESS	ALU. WIRE (NOM. DIA.)	PVC TYPE ST-2 105°C (MIN. THICKNESS)	approx	approx	Ohm/Km	Ohm/Km	approx	µF/Km	Ohm/Km	V/A/Km	In Air (at 40°C) STANDARD CABLE	In Ground (at 30°C) STANDARD CABLE	KA	Tol. ± 5 %	
Cores X Sq.mm	mm	mm	mm	mm	mm	Kg/Km	Ohm/Km	Ohm/Km	Ohm/Km	µF/Km	Ohm/Km	V/A/Km	Amps	Amps	KA	m	
1 X 25	1.2	NA	1.4	1.24	14.00	255	1.20	1.608	0.117	0.40	1.612	2.79	121	118	2.23	98	98
1 X 35	1.2	NA	1.4	1.24	15.00	300	0.868	1.163	0.112	0.44	1.168	2.02	146	138	3.12	119	116
1 X 50	1.3	NA	1.4	1.24	16.00	355	0.641	0.859	0.106	0.46	0.866	1.50	185	168	4.45	145	137
1 X 70	1.4	NA	1.4	1.24	18.00	450	0.443	0.594	0.100	0.51	0.602	1.04	235	202	6.23	185	168
1 X 95	1.4	NA	ALU. STRIP														
1 X 120	1.5	NA	4.0 X 0.8	1.40	19.0	515	0.32	0.429	0.099	0.59	0.44	0.76	280	236	8.46	235	202
1 X 150	1.7	NA	4.0 X 0.8	1.40	20.5	610	0.253	0.339	0.095	0.62	0.352	0.61	324	263	10.68	276	230
1 X 185	1.9	NA	4.0 X 0.8	1.40	22.5	715	0.206	0.276	0.093	0.62	0.291	0.50	371	292	13.35	314	256
1 X 240	2.0	NA	4.0 X 0.8	1.40	24.5	850	0.164	0.22	0.092	0.60	0.238	0.41	435	331	16.47	366	290
1 X 300	2.1	NA	4.0 X 0.8	1.56	27.0	1055	0.125	0.168	0.089	0.65	0.190	0.33	512	380	21.36	434	335
1 X 400	2.4	NA	4.0 X 0.8	1.56	29.5	1280	0.100	0.134	0.087	0.69	0.160	0.28	590	425	26.70	500	376
1 X 500	2.6	NA	4.0 X 0.8	1.56	33.0	1595	0.0778	0.104	0.086	0.70	0.135	0.23	690	483	35.60	589	429
1 X 630	2.8	NA	4.0 X 0.8	1.72	37.0	1975	0.0605	0.081	0.084	0.72	0.117	0.20	798	546	44.50	685	485
1 X 800	3.1	NA	4.0 X 0.8	1.72	41.5	2475	0.0469	0.063	0.083	0.77	0.104	0.18	915	611	56.07	793	546
1 X 1000	3.3	NA	4.0 X 0.8	1.88	46.0	3080	0.0367	0.049	0.082	0.77	0.096	0.17	1040	675	71.20	907	608
					51.0	3790	0.0291	0.039	0.081	0.81	0.090	0.16	1160	727	89	1022	665
2 X 25	0.9	0.3	G.I. STRIP														
2 X 35	0.9	0.3	4.0 X 0.8	1.40	20.5	670	1.20	1.608	0.0802	0.89	1.61	3.22	135	136	2.225	109	114
2 X 50	1.0	0.3	4.0 X 0.8	1.40	22.0	770	0.868	1.163	0.08	0.96	1.17	2.34	164	161	3.115	133	136
2 X 70	1.1	0.3	4.0 X 0.8	1.40	24.0	920	0.641	0.859	0.076	0.98	0.862	1.72	204	197	4.45	162	161
2 X 95	1.1	0.4	4.0 X 0.8	1.56	27.0	1150	0.443	0.594	0.075	1.10	0.599	1.20	251	235	6.23	204	197
2 X 120	1.2	0.4	4.0 X 0.8	1.56	29.0	1345	0.32	0.429	0.073	1.11	0.435	0.87	298	270	8.455	251	235
2 X 150	1.4	0.4	4.0 X 0.8	1.56	31.5	1575	0.253	0.339	0.071	1.11	0.346	0.69	340	305	10.68	287	266
2 X 185	1.6	0.5	4.0 X 0.8	1.72	35.0	1835	0.206	0.276	0.071	1.11	0.285	0.57	390	339	13.35	328	296
2 X 240	1.7	0.5	4.0 X 0.8	1.72	38.0	2160	0.164	0.22	0.071	1.11	0.231	0.46	450	385	16.465	379	335
2 X 300	1.8	0.6	4.0 X 0.8	1.88	41.5	2650	0.125	0.168	0.071	1.11	0.182	0.36	527	437	21.36	448	385
2 X 400	2.0	0.6	4.0 X 0.8	2.04	45.0	3125	0.100	0.134	0.071	1.12	0.152	0.30	600	488	26.7	513	432
					51.0	3875	0.0778	0.104	0.07	1.12	0.125	0.25	694	542	35.6	593	487

SIZE	EB-XLPE INSULATION (120°C)	INNER SHEATH - EXTRUDED	ARMOUR	OUTER SHEATH	OVERALL DIA. OF CABLE	NET WEIGHT OF CABLE	MAX. D.C. RESISTANCE OF CONDUCTOR AT 20°C	MAX. A.C. RESISTANCE AT 105°C	REACTANCE AT 50 Hz	CAPACITANCE	IMPEDANCE	VOLTAGE DROP	CONTINUOUS CURRENT CARRYING CAPACITY		SHORT CIRCUIT RATING (DURATION 1 SEC.)	PACKING		
													at conductor temp. 105°C	at conductor temp. 90°C				
CORES X CROSS SECTIONAL AREA	NOM. THICKNESS	MIN. THICKNESS	G. I. Flat Strip	PVC TYPE ST-2 105°C (MIN. THICKNESS)	approx	approx	Ohm/Km	Ohm/Km	approx	approx	Ohm/Km	V/A/Km	Amps	Amps	KA	In Air (at 40°C) STANDARD CABLE	In Ground (at 30°C) STANDARD CABLE	Tol. ± 5 %
Cores X Sq.mm	mm	mm	mm	mm	mm	Kg/Km	Ohm/Km	Ohm/Km	Ohm/Km	μF/Km	Ohm/Km	Amps	Amps	Amps	KA	Amps	Amps	m
3 X 95	1.1	0.4	4.0 X 0.8	1.56	32.0	1625	0.32	0.429	0.073	0.61	0.435	0.75	258	228	8.455	216	197	500
3 X 120	1.2	0.4	4.0 X 0.8	1.56	34.5	1940	0.253	0.339	0.071	0.63	0.346	0.60	295	257	10.68	249	223	500
3 X 150	1.4	0.5	4.0 X 0.8	1.72	38.5	2310	0.206	0.276	0.071	0.64	0.285	0.49	335	288	13.35	284	249	500
3 X 185	1.6	0.5	4.0 X 0.8	1.88	42.5	2800	0.164	0.22	0.071	0.65	0.231	0.40	391	326	16.465	329	282	500
3 X 240	1.7	0.6	4.0 X 0.8	2.04	47.0	3485	0.125	0.168	0.071	0.66	0.182	0.32	460	370	21.36	392	327	500
3 X 300	1.8	0.6	4.0 X 0.8	2.20	51.5	4175	0.100	0.134	0.071	0.67	0.152	0.26	528	420	26.7	452	369	500
3 X 400	2.0	0.7	4.0 X 0.8	2.52	59.0	5275	0.0778	0.104	0.070	0.67	0.125	0.22	608	472	35.6	526	420	500

3½ X 25	0.9/0.7	0.3	4.0 X 0.8	1.40	22.5	800	1.20/1.91	1.61/2.56	0.0802	0.41	1.61	2.79	115	114	2.230	93	95	1000
3½ X 35	0.9/0.7	0.3	4.0 X 0.8	1.40	24.5	945	0.868/1.91	1.16/2.56	0.08	0.47	1.17	2.03	140	135	3.12	114	114	1000
3½ X 50	1.0/0.9	0.3	4.0 X 0.8	1.40	27.5	1170	0.641/1.20	0.859/1.61	0.076	0.5	0.862	1.49	175	164	4.45	138	134	1000
3½ X 70	1.1/0.9	0.4	4.0 X 0.8	1.56	31.5	1535	0.443/0.868	0.594/1.16	0.075	0.53	0.599	1.04	216	197	6.23	175	164	500
3½ X 95	1.1/1.0	0.4	4.0 X 0.8	1.56	35.0	1865	0.320/0.641	0.429/0.859	0.073	0.61	0.435	0.75	258	228	8.45	216	197	500
3½ X 120	1.2/1.1	0.4	4.0 X 0.8	1.72	38.5	2280	0.253/0.443	0.339/0.594	0.071	0.63	0.346	0.6	295	257	10.68	249	223	500
3½ X 150	1.4/1.1	0.5	4.0 X 0.8	1.72	42.5	2660	0.206/0.443	0.276/0.594	0.071	0.64	0.285	0.49	335	288	13.35	284	249	500
3½ X 185	1.6/1.1	0.5	4.0 X 0.8	1.88	47.0	3225	0.164/0.320	0.220/0.429	0.071	0.65	0.231	0.4	391	326	16.46	329	282	500
3½ X 240	1.7/1.2	0.6	4.0 X 0.8	2.04	52.5	4030	0.125/0.253	0.168/0.339	0.071	0.66	0.182	0.32	460	370	21.36	392	327	500
3½ X 300	1.8/1.4	0.6	4.0 X 0.8	2.20	57.5	4820	0.100/0.206	0.134/0.276	0.071	0.67	0.152	0.26	528	420	26.7	452	369	500
3½ X 400	2.0/1.6	0.7	4.0 X 0.8	2.52	65.5	6095	0.0778/0.164	0.104/0.220	0.070	0.67	0.125	0.22	608	472	35.6	526	420	500
4 X 25	0.9	0.3	4.0 X 0.8	1.40	24.0	875	1.20	1.608	0.0802	0.41	1.61	2.79	115	114	2.225	93	95	1000
4 X 35	0.9	0.3	4.0 X 0.8	1.40	26.0	1045	0.868	1.163	0.080	0.47	1.17	2.03	140	135	3.115	114	114	1000
4 X 50	1.0	0.3	4.0 X 0.8	1.56	30.0	1310	0.641	0.859	0.076	0.5	0.862	1.49	175	164	4.45	138	134	500
4 X 70	1.1	0.4	4.0 X 0.8	1.56	34.0	1685	0.443	0.594	0.075	0.53	0.599	1.04	216	197	6.23	175	164	500
4 X 95	1.1	0.4	4.0 X 0.8	1.56	37.5	2055	0.320	0.429	0.073	0.61	0.435	0.75	258	228	8.455	216	197	500
4 X 120	1.2	0.5	4.0 X 0.8	1.72	41.0	2500	0.253	0.339	0.071	0.63	0.346	0.60	295	257	10.68	249	223	500
4 X 150	1.4	0.5	4.0 X 0.8	1.88	45.5	3015	0.206	0.276	0.071	0.64	0.285	0.49	335	288	13.35	284	249	500
4 X 185	1.6	0.5	4.0 X 0.8	2.04	50.5	3655	0.164	0.22	0.071	0.65	0.231	0.40	391	326	16.46	329	282	500
4 X 240	1.7	0.6	4.0 X 0.8	2.20	56.5	4544	0.125	0.168	0.071	0.66	0.182	0.32	460	370	21.36	392	327	500
4 X 300	1.8	0.7	4.0 X 0.8	2.36	62.0	5490	0.100	0.134	0.071	0.67	0.152	0.26	528	420	26.7	452	369	500
4 X 400	2.0	0.7	4.0 X 0.8	2.68	71.0	6895	0.0778	0.104	0.070	0.67	0.125	0.22	608	472	35.6	526	420	500

NOTE: 1) The current ratings given are for the standard conditions of installation as per IS: 3961. For different ambient or different grouping conditions rating factors given therein shall be applicable to the standard rating.

2) For 1 core and 2 core cables, the current ratings for DC current will be provided on request.



### E-BEAM

Solar PV Cables,  
Wind Mill Cables,  
Ship Wiring Cables,  
Locomotive Cables,  
Control & Flexible Cable,  
PVC Winding wires,  
Automotive Wires,  
Specialty Cables.

### ELECTRICAL

PVC Cables UPTO 1.1KV,  
XLPE Cables UPTO 33KV,  
ABC Cables upto 33kv,  
Instrumentation Cables,  
Concentric Core Cables,  
Flexible cables & wires,  
FR/FRLS/LSOH Cables,  
Under Water Cables,  
Fire Survival Cables.

### ELASTOMER

Trailing Cables,  
Locomotive Cables,  
Ship Wiring Cables,  
EPR, Silicon & EVA Cables.  
Wind Mill Cables,  
Welding Cables,  
LFH Cables & Wires,  
Fire Survival Cables,  
Mining Cables.

### TELECOM

Optical Fiber Cables,  
Armored Optic Fiber cables,  
Railway signaling cables  
Railway signaling cables  
Indoor Telephonic Cables,  
Composite Cables with OFC,  
Fire Survival Cables OFC,  
Cat3/Cat 5 LAN Cables,  
Torpedo Cables,  
Tow Cables.

## APAR INDUSTRIES LTD (UNIT: UNIFLEX CABLES)

**Corporate Office:** 12/13, Jyoti Wire House, 23-A, Shah Industrial Estate, Off. Veera Desar Road, Andheri (West), Mumbai - 400 053  
☎ 022-26740001/2/3 (Fax) 022-26740600  
✉ info.cable@apar.com

**Registered Office:** 301/306, Panorama Complex, R.C. Dutt Road, Vadodara - 390007  
☎ 0265 - 2327186/87 (Fax) 0265 - 2322798  
🌐 www.apar.com

### WORKS :

**Unit : 1** 158/163, Gidc, Umbergaon, Dist. Valsad, Gujarat - 396 171.  
☎ :0260-2562412 (Fax) : 0260-2563950  
✉ info.cable@apar.com

**Unit : 2** Khata no. 1049, Survey no. 82/2p, 88,861/1, 862/1, 863/1, Manekpur Road, Khatalwada, Umbergaon, Dist. Valsad, Gujarat - 396120  
☎ : 0260-2406100 (Fax) : 0260-2406149  
✉ info.cable@apar.com

### LIST OF BRANCH OFFICES :

**NEW DELHI** 301/306& 307, BMC House N-01, Block Middle Circle, Connaught circus, New Delhi - 110 001  
☎ 011-32085575 / 011-41523320 (Fax) 011-23329490/23714326

**KOLKATA** Flat No. 24, Gulmohar Building, 6C, Middleton Street, Kolkata - 700 071  
☎ 033-22833418 (Fax) 033-22877562

**CHENNAI** Door Old No. 43, New No. 63, 53rd Street, Ashokk Nagar, Chennai - 600 083  
☎ 044-24891508 (Fax) 044-24892297

**BANGALORE** No.27, Srinilaya, III Main 10th Cross Margoza Road, Malleshwaram, Bangalore - 560 003  
☎ 080-23344507 (Fax) 080-23343415

**HYDERABAD** Flat No. 907, 9th Floor, Babu Khan Estate, Basheerbagh, Hyderabad - 500 001  
☎ 040 - 23298514 (Fax) 040 - 23243406

**VADODARA** 301/306, Panorama Complex, R.C. Dutt Road, Vadodara - 390007  
☎ 0265 - 2327186/87 (Fax) 0265 - 2330309